

# SPIRIT BTW UNIT

## FITTING INSTRUCTIONS

Please retain for future reference

### Installation general notes


1. The unit can be secured to the wall if required using suitable angle brackets (not supplied)
2. Any cuts made to the unit for plumbing etc should be re-sealed using a suitable varnish / water resistant paint

### WC / Bidet installation

These notes are only meant as guidance. The WC / Bidet should be fitted as per the manufacturers guidelines

1. Remove the front access top fascia by gently pulling it forwards
2. Remove the main access panel by lifting vertically upwards
3. Fit unit to wall ensuring correct positioning of all plumbing
4. Fit WC and Cistern according to manufacturers instructions - **check system carefully for leaks**
5. Cut a suitable slot in the main panel to allow for inlet and soil pipes. Re-seal all cut faces. Slide this panel back into place. Silicone the joint between the pan and panel
6. Fit the worktop (supplied separately). If fitting in a run see notes below:
7. For WC's drill a suitable hole for the cistern lever / push button. Secure to the fascia if required and then re-fit fascia to unit

NOTE: Make allowances as per manufacturers instructions for access to the cistern in case of any issues

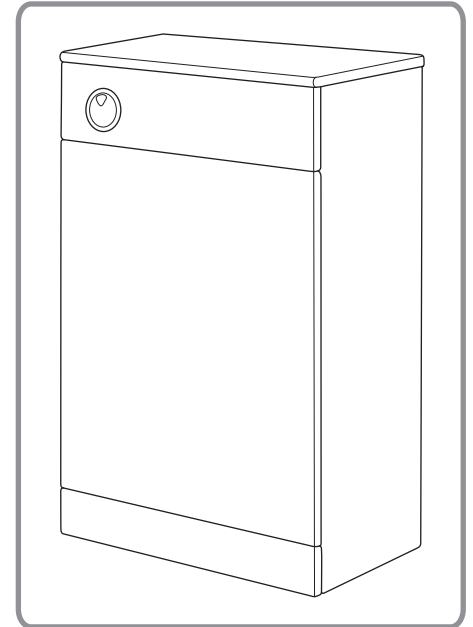

Cistern and worktop sold separately

### Fitting the furniture in runs

The BTW unit can be used in runs along with the floor cupboard and either the 500 or 600 Esprit units. The installation should be completed as below:

1. If a longer plinth is to be used, the plinths on the current units should be removed before installation
2. It is advised that you should secure the furniture together using the screws provided. Clamp the units in place and then drill a suitable pilot hole before screwing together. Alternatively connecting bolts (as used in kitchens) can be used (not supplied)
3. Secure the longer plinth in place. If the run is over 1220mm long then the plinth from one of the units can be used with a join concealed behind the pan to create the impression of a longer plinth. Again - any cuts made should be sealed
4. If the BTW unit is being used with a floor cupboard the longer (804mm) worktop should now be installed. This should be screwed to the BTW unit and fixed to the cupboard using the strips provided

### Cleaning and maintenance

1. Clean with a soft damp cloth only. Do not scrub / scour or use cream cleaners or cleaners containing bleach
2. Any water spillages or heavy condensation should be wiped away immediately to prevent any deterioration
3. To remove lime-scale deposits, use a proprietary cleaner having first checked that it is suitable. If necessary, test on an inconspicuous area first