


PHASE BACKTO WALL WC / BIDET UNIT Installation & care instructions

Please retain for future reference

Important Installation Notes

- * This unit is not designed for wall hung sanitary-ware
- * It is essential that any surfaces of the unit which are cut during installation are resealed using an appropriate waterproof sealant, varnish or oil based paint. Failure to reseal cut surfaces will invalidate the product warranty and may result in water damage.





Installing WC / Bidet


Please note that these instructions are a guide only and may not be appropriate for all installations. Fit WC / Bidet according to manufacturer's instructions. The main access panel and fascia are designed to be fitted / removed after the WC / bidet is installed.


Steps:

- 1. Remove fascia by gently pulling it.
- 2. Remove main access panel by lifting it off the location clips.
- 3. Fit base unit to wall in required location ensuring correct position of supply and waste pipes.
- 4. Fit WC and cistern according to manufacturer's instructions check system carefully for leaks.
- 5. Cut a suitable slot in the main access panel to allow for the soil pipe. Note: Cut this slot as wide as possible to make refitting the main access panel easier. The cut surfaces should then be sealed with an appropriate waterproof sealant. Refit the panel by sliding it back into the location clips. Silicone the join between WC and access panel.
- 6. Fit worktop
- 7. Drill suitably positioned / diameter hole in the fascia for the cistern operating button and install according to manufacturers guidelines.
- 8. Refit fascia.

The installation of a bidet is identical, except there is no requirement for a cistern & operating button.

All wooden furniture should be treated with care...

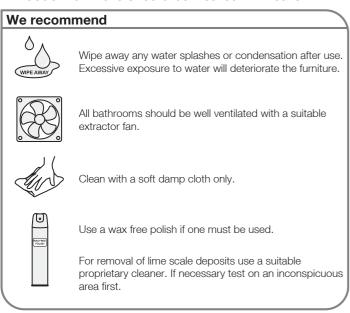

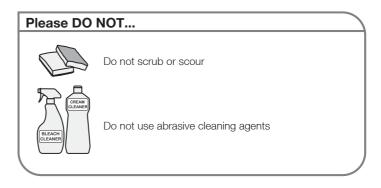

Replacement components

Should you require any replacement components for this product please contact Tavistock using the contact details below.